77FTX


4x4 TRACTOR
210 HP (157 KW) / 275 HP (205 KW)



Game Equipment LLC 3322 Hwy 308 Napoleonville, LA USA 70390-8904 Ph: 985-369-9292 Fax: 985-369-9595 www.gameeq.com

77FTX 4x4 TRACTOR 210 HP (157 KW) / 275 HP (205 KW)



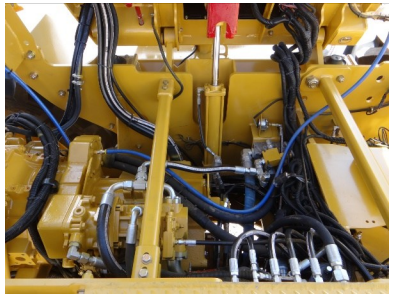




Tilting platform and hood provide unmatched access to engine, coolers, transmission, and under-hood and cab components. Both work via hand or electric pump, even when systems are down.



Engine and transmission coolers with 8 fins per inch spacing reduce buildup of debris. Hood rolls up for easy cleaning.

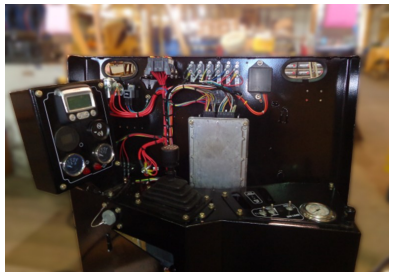

Individual gauges and indicators simplify operation, troubleshooting, and repair.

GAME tractors are designed and manufactured from the ground up for the most demanding conditions the world has to offer. Heavy-duty industrial frames, belly pans, drivelines, powertrain components, and hitches are standard.






Hood profile provides excellent visibility.





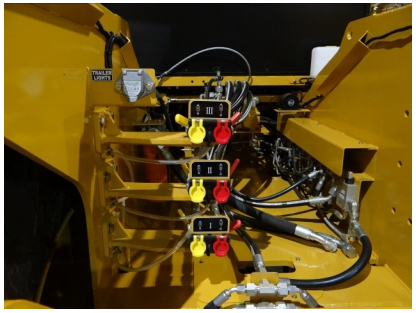

Built to withstand extreme applications, the frame accommodates multiple hitch configurations for high weight transfer, winches, and other equipment.

GAME Equipment reserves the right to change specifications without notice. Some photos may contain optional equipment.

Game Equipment LLC 3322 Hwy 308 Napoleonville, LA USA 70390-8904 Ph: 985-369-9292 Fax: 985-369-9595 www.gameeq.com

77FTX 4x4 TRACTOR 210 HP (157 KW) / 275 HP (205 KW)

ENGINE
- John Deere 6068HF, 210 HP (157 KW) @ 2,400 RPM, 568 FT-LB (771 NM) @ 1,400 RPM mechanical engine, inline fuel pump (export only)
- Severe dust, dry, dual stage air cleaner with service indicator and pre-cleaner
- Fuel/water separator with secondary fuel filter
- Large tropical radiator, transmission, and hydraulic oil coolers are 8 fins/inch and rubber isolator mounted
- 120-gal (455-liter) steel fuel tank with lockable cap and 12 -inch clean out door
- Manual hydraulic tilting hood allows easy cleaning of coolers and service of engine and under hood parts

Option:
- John Deere 6068HF, Tier III electronic engine, 275HP (205KW) @ 2,400 RPM. Peak torque of 756 FT-LB (1,025 NM) @ 1,400 RPM (export only)

TRANSMISSION
- Direct drive powershift transmission with bump shifter and inching pedal
- 8 forward/4 reverse gears
- Spring applied/Hydraulic release driveline parking brake
- Separate cooler/system isolates transmission from hydraulic system contamination

Optional:
- 11 speed, direct drive, electronically controlled, powershift transmission - 11F/3R

AXLES
- All wheels are powered
- Heavy duty, outboard planetary, dual reduction axles
- Ring and pinion reduction with planetary final drives
- Front oscillating and rear rigid axles
- Internal oil bath service brakes
- Hydraulically actuated differential locking front axle
- Hydraulically actuated differential locking rear axle

CHASSIS
- Heavy duty welded frame
- Double acting, heavy duty welded hydraulic cylinder for steering
- Belly pans and front pull hook
- Painted with yellow gloss finish

STANDARD EQUIPMENT
- Engine oil pressure gauge and indicator
- Engine coolant temperature gauge and indicator
- Voltage gauge
- Fuel gauge
- Tachometer with hour meter
- Low hydraulic oil level light / indicator
- Transmission oil temperature gauge and indicator
- Transmission pressure gauge and indicator
- Oil filter service warning light / indicator

ELECTRICAL
- (2) 12-VDC, 950 CCA, 180 RC Group 31XHE heavy duty maintenance free commercial batteries
- 12-Volt DC, 160-Amp alternator
- Horn, reverse alarm, and master disconnect switch
- Four LED headlights in hood
- Two adjustable front and two rear/side LED work lights
- Two LED work lights in rear bumper
- Brake and indicator lights in rear bumper with warning lights top of cab (viewable front and rear)
- Strobe light
- 7-pin electrical connector capable of multiple trailer operation

OPERATOR'S STATION
- ROPS/FOPS certified A/C cab with rear wiper
- AM/FM radio, marine grade, with USB, AUX port and Bluetooth
- Manual hydraulic tilting cab platform for transmission, engine, and component service
- Adjustable tilt and telescopic steering column
- Vinyl cushion mechanical suspension seat with position adjustment and armrest

Optional:
- Leather, heated/ventilated, toggle link, semi-active suspension with fully adjustable air ride, backrest, lumbar, head and arm rests seat; 20-degree swivel right, 60-degree swivel left
- Electric cab/hood tilt
- Training seat

HYDRAULIC SYSTEM
- Open center pump for brakes, steering, and implement valve
- 39-gal (148 L) pressurized hydraulic tank with 100% filtration and 12-inch clean out door
- Manual 4 Bank valve (1 motor spool with detent, 3 cylinder spools)
- Hydraulic brakes with accumulator to provide braking during engine down emergencies


MISC OPTIONS
- Hydraulic brake ports on rear for trailer
- Front push bumper
- Heavy duty fixed/swinging drawbar
- Welded rear extension with pintle hook
- Category III, 3-point hitch with float and draft assist
- PTO
- Fire extinguisher


TIRES
- (2) 520/85R46 R2 Radials (rear)
- (2) 340/85R46 R2 Radials (front)
- Heavy duty one-piece rims

GAME Equipment reserves the right to change specifications without notice. Some photos may contain optional equipment.

Game Equipment LLC 3322 Hwy 308 Napoleonville, LA USA 70390-8904 Ph: 985-369-9292 Fax: 985-369-9595 www.gameeq.com


77FTX 4x4 TRACTOR 210 HP (157 KW) / 275 HP (205 KW)

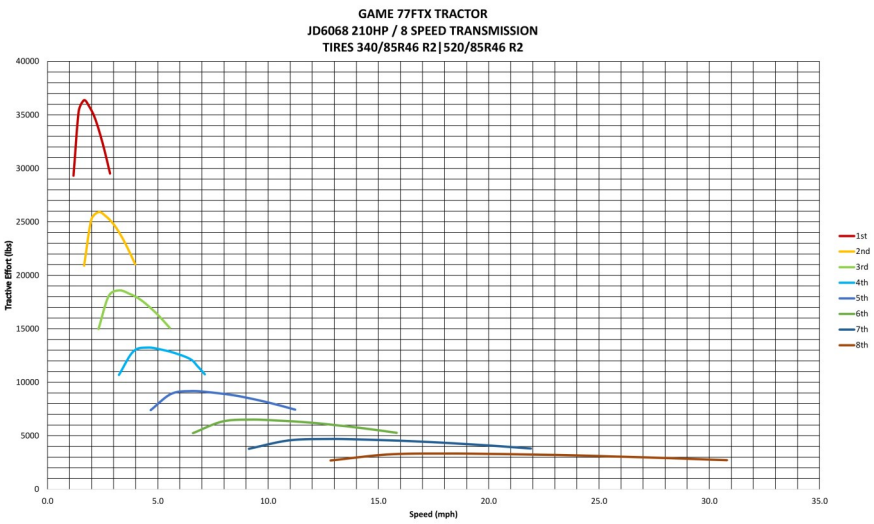


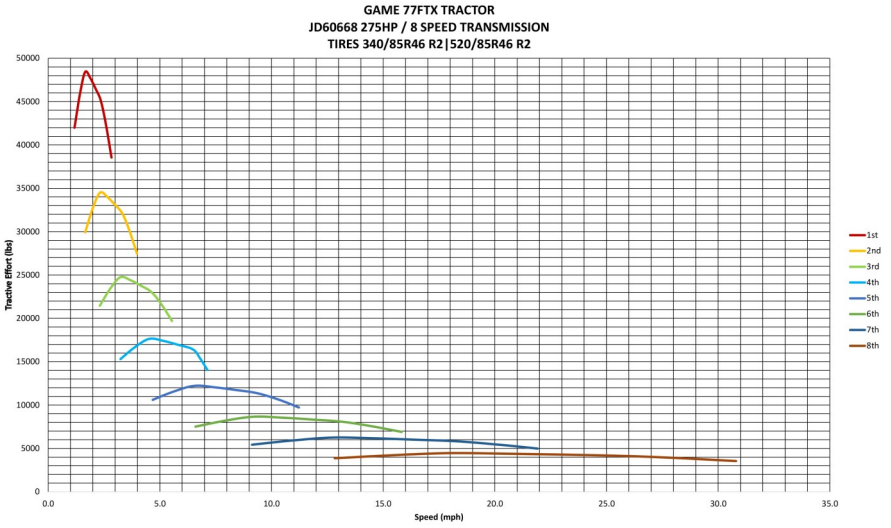

Specifications:

Unladen Tractor Weight	23,000–26,000 lbs (10,432 - 11,793 kg)
Unladen Weight Distribution	58% Front Axle 42% Rear Axle
Steering	Inner Turning Radius: 180” (4572 mm) 153” W/Brake (3886 mm) Outer Turning Radius: 302” (7670 mm)
Shipping	**Export -** 1 Tractor per standard high cube 40’ container **Domestic** - Assembled tractor ships via trailer.

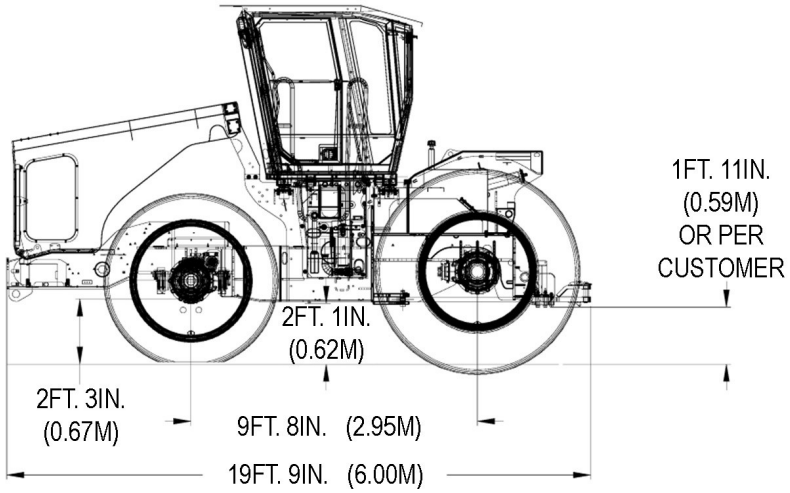

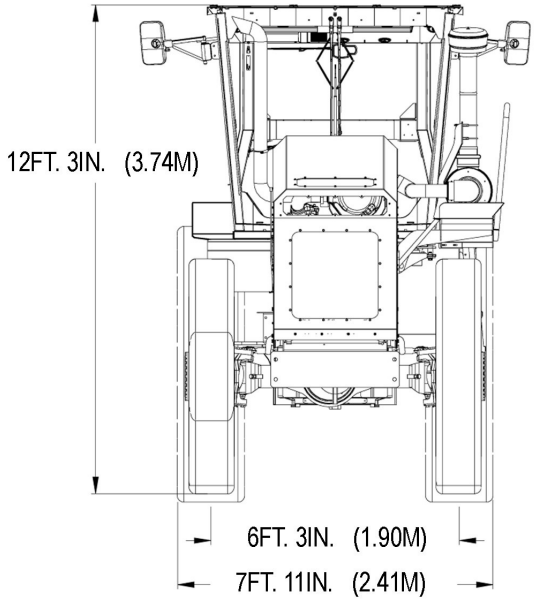

09/15/26

GAME Equipment reserves the right to change specifications without notice. Some photos may contain optional equipment.

Game Equipment LLC 3322 Hwy 308 Napoleonville, LA USA 70390-8904 Ph: 985-369-9292 Fax: 985-369-9595 www.gameeq.com