4700LX

4700LX SUGAR CANE LOADER
225 HP (168KW) / 210 HP (157KW)



Game Equipment LLC 3322 Hwy 308 Napoleonville, LA USA 70390-8904 Ph: 985-369-9292 Fax: 985-369-9595 www.gameeq.com

4700LX

SUGAR CANE LOADER 225 HP (168KW) / 210 HP (157KW)



Large 1 Ton grab capacity increases efficiency.



Elevated cat walk with all around access to engine and cooling package components. Removable panels allow for easy access for maintenance.



Easy to use with lots of pushing power due to high HP hydrostatic drive train.

Plenty of room in cab for comfort and to limit fatigue.



GAME tractors are designed and manufactured from the ground up for the most demanding conditions the world has to offer. Heavy-duty industrial frames, belly pans, drivelines, powertrain components, and hitches are standard.

Long reach boom to pack the cane deep down into the cart and load in 1.8 meter rows.



GAME Equipment reserves the right to change specifications without notice. Some photos may contain optional equipment.

Game Equipment LLC 3322 Hwy 308 Napoleonville, LA USA 70390-8904 Ph: 985-369-9292 Fax: 985-369-9595 www.gameeq.com

4700LX

SUGAR CANE LOADER 225 HP (168KW) / 210 HP (157KW)

ENGINE

- Cummins B 6.7, Stage V / Final Tier IV electronic engine, 225 HP (168 KW) @ 2,500 RPM with 240 HP (179 KW) @ 2,200 RPM bulge, Peak torque of 700 FT-LB (1044 NM) @ 1,500 RPM
- Severe dust, dry, dual stage air cleaner with service indicator and pre-cleaner
- Fuel/water separator with secondary fuel filter
- Large tropical radiator and oil coolers mounted on rubber isolators, 8 fins/inch spacing and swing out to ease cleaning
- Reversing cooling fan to clean coolers and screens
- 135-gal (510-liter) steel fuel tank with lockable cap and 12-inch clean out door
- Deck with handrails around entire engine, pumps, filters, coolers, and service area

Optional:

- John Deer 6068hf, 210 HP (157 KW) @ 2,400 RPM, 568 FT-LB (771 NM) @ 1,400 RPM mechanical engine

GROUND DRIVE

- (2) Heavy duty variable displacement Hydrostatic pumps and (4) two-speed heavy duty hydrostatic motors for wheel drives
- Rigid front and rear oscillating steering axle with heavy duty planetary final drives
- Spring applied hydraulic release parking brakes
- Infinitely variable operating speeds in forward and reverse
- All four wheels are powered full time
- Low speed range; 0 - 8.7 MPH/ 0 - 14 KPH
- High speed range; 0-18.6 MPH/ 0-30 KPH
- Independent 38-gal hydrostatic tank and cooler

TIRES

Standard:

- 24.5X32, R1 12-ply front and 18.4X26, R1 12-ply rear (optional R2)

Optional:

- 30.5X32, R1 14 ply front and 23.1X26, R1 12 ply rear (optional R2)

Standard:

- 3.0 Meter track spacing

Optional:

- Axle spacers to move tracks to 3.3, 3.5, or 3.6 meters can be ordered to fit any new or existing unit

CANE HANDLING

- Oversized, standardized, pins and bushings at cylinder and pivot points
- 180-degree boom swing right and left, cushioned at both extremes
- Front mounted piler bar with 2.5-in (63.50mm) adjustable mounting positions for tines
- Push piler

Optional:

- 10-chain piler

HYDRAULIC SYSTEM

- Closed center, pressure compensate, piston pump for steering, boom, and piler cylinder functions
- Priority hydraulic power steering
- Pressurized hydraulic tank 68gal (257 liters) 100% filtration and 12 inch clean out door

ELECTRICAL

- (2) 12-Volt DC, 925 CCA, Group 31XHE heavy duty commercial batteries
- 12-Volt DC, 160-AMP alternator
- (4) LED headlights
- (2) LED work lights in the rear, 2 per side, and one on boom
- One service deck light
- Turn signal and warning lights front and rear mounted on extendable arms

OPERATOR'S STATION

- AC cab with AM/FM stereo
- Fully adjustable suspension seat with armrests
- Adjustable tilt steering column
- Joystick controls for boom and grab
- Foot pedal control for ground drive
- Windshield wipers (front and sides) and mirrors

Optional:


- Leather, heated/ventilated, toggle link, semi-active suspension with fully adjustable air ride, backrest, lumbar, head and arm rests seat; 20-degree swivel right, 60-degree swivel left

GAME Equipment reserves the right to change specifications without notice. Some photos may contain optional equipment.

Game Equipment LLC 3322 Hwy 308 Napoleonville, LA USA 70390-8904 Ph: 985-369-9292 Fax: 985-369-9595 www.gameeq.com

4700LX

SUGAR CANE LOADER 225 HP (168KW) / 210 HP (157KW)

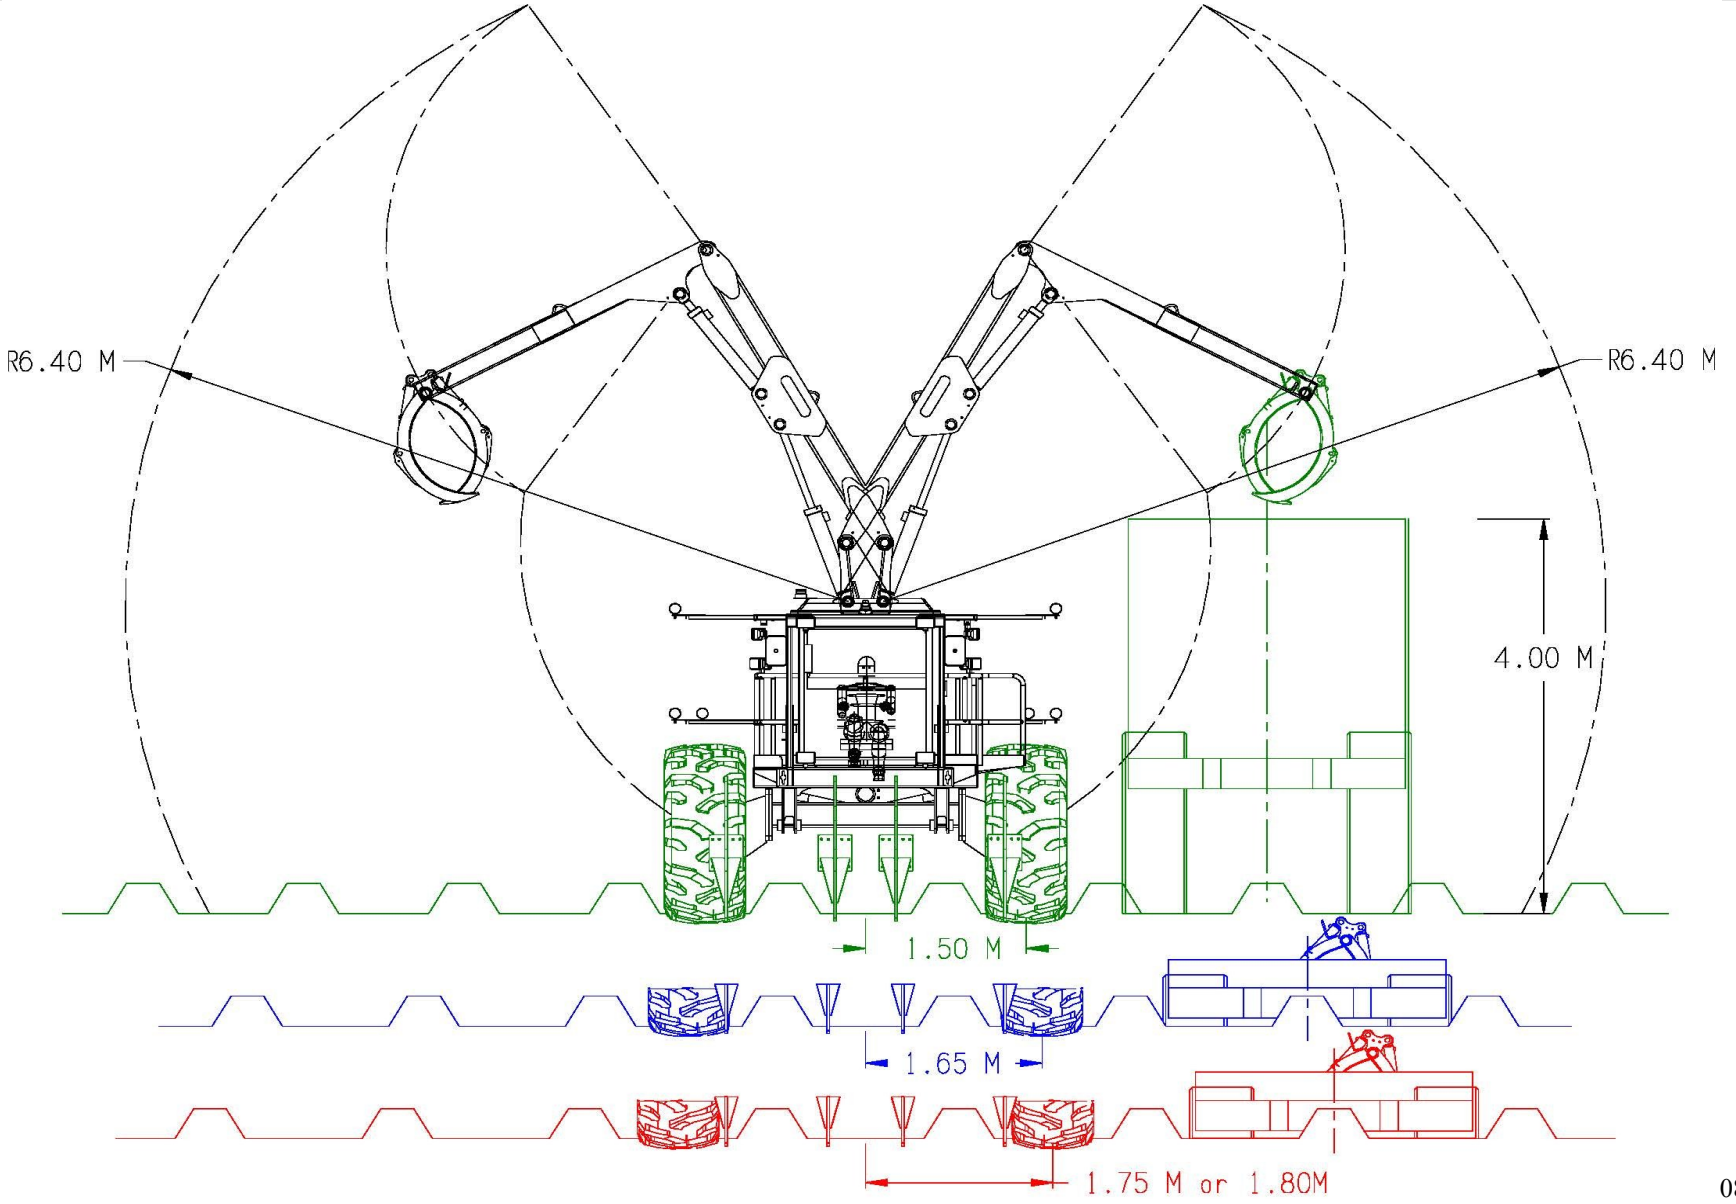

08/18/26

GAME Equipment reserves the right to change specifications without notice. Some photos may contain optional equipment.

Game Equipment LLC 3322 Hwy 308 Napoleonville, LA USA 70390-8904 Ph: 985-369-9292 Fax: 985-369-9595 www.gameeq.com